

American Association of State Highway and Transportation Officials



An Application from the State Highway or Transportation Department of

KANSAS

for
169

- Elimination of a U.S. (Interstate) Route
- Establishment of a U.S. (Interstate) Route
- Extension of a U.S. (Interstate) Route
- Relocation of a U.S. (Interstate) Route
- Establishment of a U.S. Alternate Route
- Establishment of a Temporary U.S. Route
- **Recognition of a Business Route on U.S. (Interstate) Route
- **Recognition of a By-Pass Route on U.S. Route
- *Establishment of a U.S. Bike Route
- *Relocation of a U.S. Bike Route

Between KANSAS CITY, KANSAS and LENEXA, KANSAS

The following states or states are involved:
KANSAS

For AASHTO Use Only	Date received _____	Date application acknowledged _____	Date to Special Committee on U.S. Route Numbering _____	Date considered by the Standing Committee on Highways _____	Action of Standing Committee on Highways _____	Member Department Notified _____
----------------------------	---------------------	-------------------------------------	---	---	--	----------------------------------

- 8Attach map on page 3. Obtain Signatures, page 4. Other sections not applicable.
- ** A local vicinity map needed on page 3. On page 6 a short statement to the effect that there are no deficiencies on proposed routing, if true, will suffice.
- If there are deficiencies, they should be indicated in accordance with page 5 instructions.
- All applications requesting **Interstate** establishment or changes are subject to concurrence and approval by the FHWA

Date submitted: August, 28, 2008

SUBMIT APPLICATION ELECTRONICALLY TO mvitale@ashto.org

The purpose of the **United States (U.S.) Numbered Highway System** is to facilitate travel on the main interstate highways, over the shortest routes and the best available roads. A route should form continuity of available facilities through two or more states that accommodate the most important and heaviest motor traffic flow in the area.

The routes comprising the **National System of Interstate and Defense Highways** will be marked with its own distinctive route marker shield and will have a numbering system that is separate and apart from the U.S. Numbered Highway System. For the convenience of the motorist, there must be continuity and a uniform pattern of marking and numbering these Interstate routes without regard to state lines.

The U.S. Numbered System was established in 1926 and the Interstate Numbered System was established in 1956. Both have reached the period of review, revision, and consolidation. They now need perfecting rather than expansion. Therefore, any proposed alteration in the established systems should be extremely meritorious and thoroughly, though concisely, explained in order that the Special Committee on U.S. Route Numbering and the Standing Committee on Highways of the Association may give prompt and proper consideration to each and every request made by a member department.


Explanation and Reasons for the Request: (Keep concise and pertinent.) This relocation is being done to remove US-169 from surface streets and to create a more direct routing on a controlled access facility.

Date facility available to traffic November, 2008

Does the petition propose a new routing over a portion of an existing U.S. Route? Yes If so, where? On 63rd. St. from Metcalf Ave., west to I-35 it will be routed along with US-56 and US-69.

Does the petition propose a new routing over a portion of an existing Interstate Route? Yes If so, where? On I-35 from the US-56 (63rd. St.) junction, south to the I-435 junction.

Map of state, or portion thereof, indicating proposed addition or change in the U.S. Numbered or Interstate Numbered System:

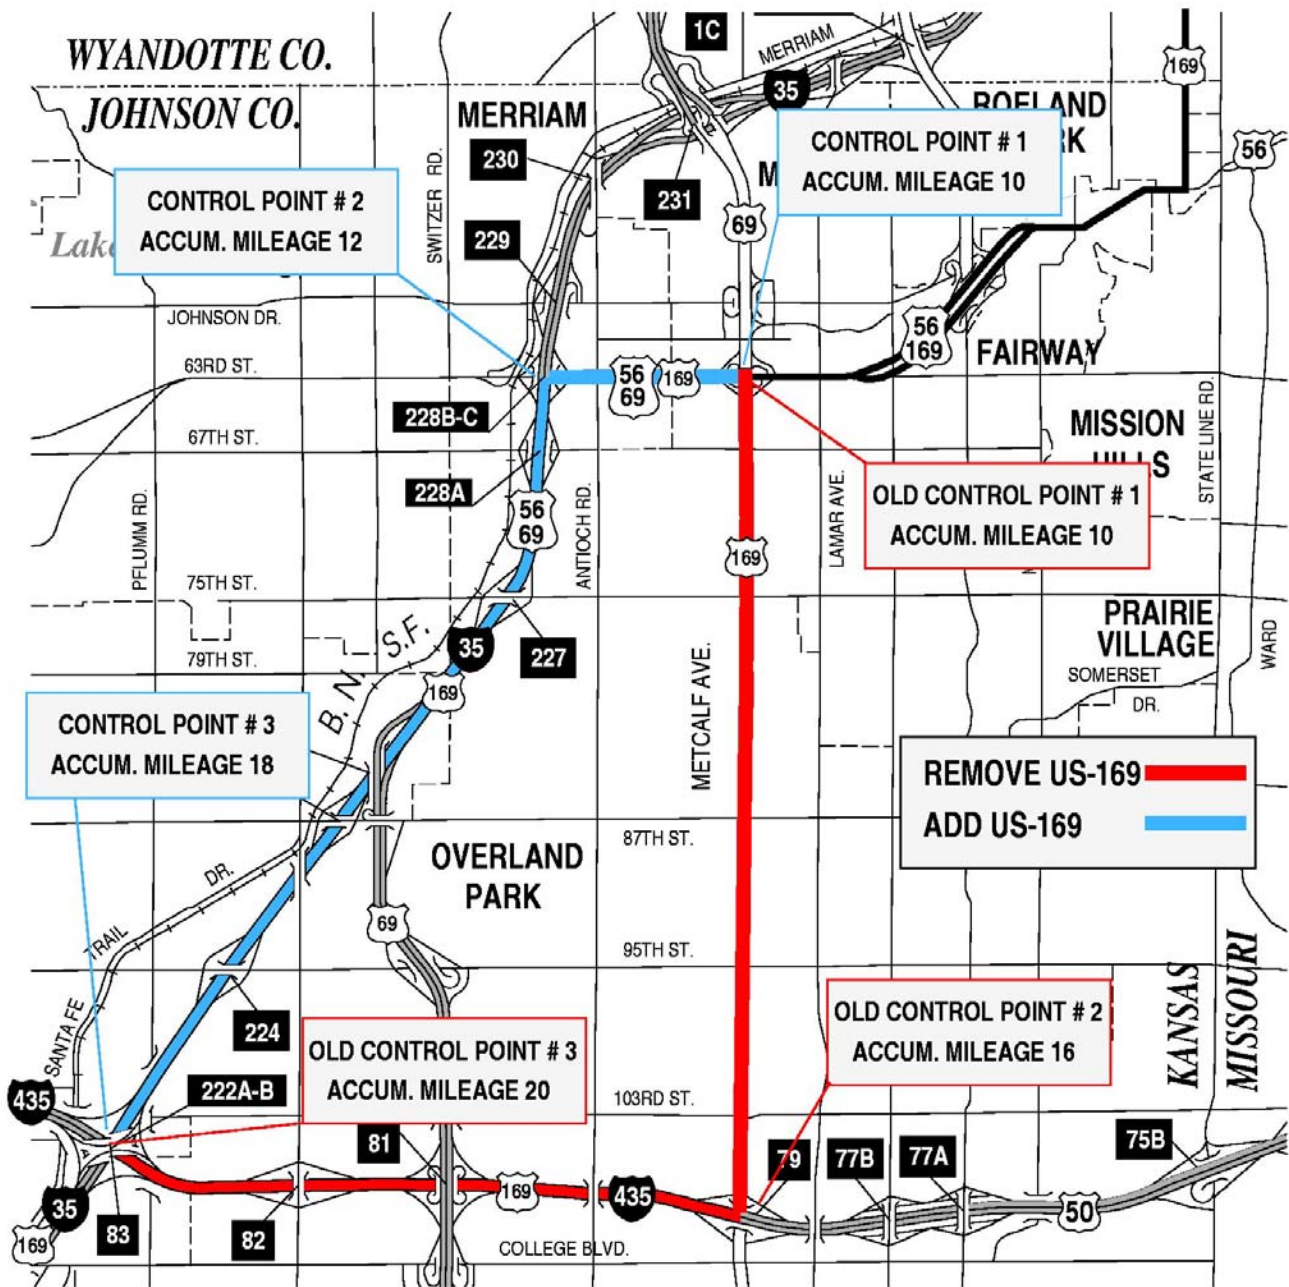

(A photographic reduction or section of departmental map attached to this sheet. May be folded to sheet size, but do not use a map larger than four 8.5 x 11 inch sheets in size.)

(Indicate termini and control points on the map for the route, and number them in sequence. Use the same numbers in column 1 tabulation, page 6, when listing mileage. **Towns, cities, major highway intersections and state lines to be used as control points.** The top of column 1, page 6, will be one terminus, and column 1 will give the log of the route as needed to describe the route in the Association publication *U.S. Numbered Highways* if the application is approved by the Standing Committee on Highways.)

The State agrees and pledges its good faith that it will not erect, remove, or change any U.S. or Interstate Route Markers on any road without the authorization, consent, or approval of the Standing Committee on Highways of the American Association of State Highway and Transportation Officials, notwithstanding the fact that the changes proposed are entirely within this State.

The weighted average daily traffic volume along the proposed route, as shown on the map on page 3, is 72,420 as compared to 4540 for the year 2006 for all other U.S. Numbered Routes in the State.

The Purpose and Policy in the Establishment and Development of the United States Numbered Highways, as Retained from October 3, 1991 or the Purpose and Policy in the Establishment of a Marking System of the Routes Comprising the National System of Interstate and Defense Highways as Retained from August 10, 1973 has been read and is accepted.

In our opinion, this petition complies with the above applicable policy.

(Signature)

Chief Executive Officer

(Member Department)

This petition is authorized by official action of _____

under date of _____ as follows: (Copy excerpt from minutes.)

A letter from your Chief Executive Officer is sufficient with the CEO signature is sufficient or copying the CEO on the email message you send AASHTO when submitting your application.

Instructions for Preparation of Page 6

Column 1: Control Points and Mileage. Top of column is one terminus of road. Indicate control points by identical number as shown on map on page 3. Show mileage between control points in miles and tenths.

Column 2: Pavement Type.	Code
High type, heavy duty	H
Intermediate type	I
Low type, dustless	L (show in red)
Not paved	N (show in red)

Column 3: Pavement Condition	Code
Excellent	E
Good	G
Fair	F (show in red)
Poor	P (show in red)

NOTE: In columns 2 and 3, where pavements types and conditions change, the location of the change shall be indicated by a short horizontal line at the proper place opposite the mileage log and the proper code letter (shown above) shall be entered in the respective column between the locations so indicated.

Column 4: Traffic. Indicate average daily traffic volumes in this column. Points of changes in these data to be indicated by short horizontal lines opposite the appropriate mileage point on the mileage log. Any existing main line rail crossing that is not separated shall be indicated at the appropriate mileage point by RXR - black if signalized - red if not protected by signals.

Columns 5 & 6 Pavement Width and Shoulder Width. These columns to be completed by comparing standards of highway involved with applicable AASHTO standards. Entries that fall to the right of the tolerance lines (dashed) should be shaded in red. If there are no deficiencies indicate by use of the word NONE.

Columns 7 & 8 Major Structures. Show in these columns those structures that do not meet AASHTO standards. Show by horizontal line sufficiently long to indicate percentage of deficiency. Portion on right of tolerance line shall be shown in red. Indicate length of structure in feet immediately under the line. Any sub-standard highway underpass structure shall be shown opposite the appropriate mileage point by the designation LP with the vertical clearance in feet following and shown in red. If there are no deficiencies indicate by the use of the word NONE.

Column 9: Vertical Sight Distance. Items to be shown in this column as a horizontal line, the length of which will indicate the deficiency as determined in accordance with comparisons with comparable AASHTO standards. Portions of the line past the tolerance line shall be shown in red.

Column 10: Horizontal Curvature. Curves in excess of AASHTO applicable standards to be shown in this column by a short horizontal line with degree of curve shown immediately above the line. To be shown in red.

Column 11 Percent Grades. Show by horizontal lines opposite proper mileage point on mileage log. Show percent of grade above the line and length of grade in feet immediately below. To be shown in red.

Mileage	1	2	3	4	5							6	7	8	9	10	11
	Control Points and Mileage	Pavement Type	Pavement Condition	Traffic ADT	Comparison to Applicable AASHTO Design Standards												
					Pavement Width Deficiency	Shoulder Width Deficiency	Major Structures				Vertical Sight Distance Deficiency	Show When In Excess of Standard					
							Roadway Width Deficiency		H-Loading Deficiency			Horizontal Curvature	Percent Grade				
					Percent				Percent					Percent			
10	20	30	40	20	40	60	80	10	20	30	40	20	40	60	80	Degree	Length
0																	
10	#1	H	E	35,900													
12	#2	H	E	130,800													
18	#3																
40																	
60																	
80																	
100																	
120																	
140																	
160																	

Attach additional sheet here if necessary

169	Kansas	Regular	Kansas City	0	0	State Line
169	Kansas	Regular	Kansas City	1	1	Crosses I-670
169	Kansas	Regular	Kansas City	1	2	Leaves I-70, U.S. 40, U.S. 69, & U.S. 24
169	Kansas	Regular	Kansas City	2	4	Crosses I-35
169	Kansas	Regular	Westwood	3	7	Joins U.S. 56
169	Kansas	Regular	Mission	3	10	Joins U.S. 69
169	Kansas	Regular	Merriam	2	12	Joins I-35,
169	Kansas	Regular	Lenexa	3	15	U.S. 69 Leaves
169	Kansas	Regular	Lenexa	3	18	Crosses I-435
169	Kansas	Regular	Olathe	7	25	Leaves U.S. 50, U.S. 56 & I-35
169	Kansas	Regular	Paola	16	41	NONE
169	Kansas	Regular	Jct. E. Garnett	34	75	U.S. 169 Bus. begins and leaves
169	Kansas	Business	Jct. E. Garnett	0	0	Route begins, leaves U.S. 169
169	Kansas	Business	Garnett	1	1	Joins U.S. 59
169	Kansas	Business	Jct. S. Garnett	1	2	Route ends, rejoins U.S. 169
169	Kansas	Regular	Jct. S. Garnett	2	77	Joins U.S. 59; U.S. 169 Bus. rejoins and ends
169	Kansas	Regular	Jct. S. Garnett	4	81	Leaves U.S. 59
169	Kansas	Regular	Iola	22	103	Crosses U.S. 54
169	Kansas	Regular	Chanute	18	121	NONE
169	Kansas	Regular	Jct. N.E. Cherryvale	25	146	Crosses U.S. 400
169	Kansas	Regular	Jct. S.W. Cherryvale	9	155	Joins U.S. 160
169	Kansas	Regular	2nd Jct. S.W. Cherryvale	1	156	Leaves U.S. 160
169	Kansas	Regular	Jct. N.E. Coffeyville	12	168	Joins U.S. 166
169	Kansas	Regular	Coffeyville	2	170	Leaves U.S. 166
169	Kansas	Regular	State Line	2	172	NONE

(This includes US, Interstates and **Bicycle Routes**)

Contact regarding this application:

Name: Fred Holthaus

Address: Kansas Department of Transportation, Eisenhower State Office Building, Topeka, Kansas 66603-3745

Telephone Number: 785-296-4866

Fax Number: 785-296-8168

Email Address: fredh@ksdot.org

Description to be provided to the AASHTO Highways Special Committee on US Route Number (USRN) when they review this application: **US-169 KANSAS**

- Where does the route begin? (Intersection or Mile Marker) The change for this route begins within the city of Overland Park, Kansas, near the east edge of Johnson County at milepost 10.
- Describe where it is going? The route previously went south from this point along Metcalf Ave., a distance of 6 miles, where it joined I-435, then west 4 miles to the junction of I-35. Now the route will proceed west along with US-56 & US-69, from milepost 10 in Overland Park to junction with I-35 in Merriam, a distance of about 2 miles to the junction of I-35, at new milepost 12, then south along I-35 to the junction of I-435 where it rejoins its current alignment.
- What type of facility is it traveling over? (New alignment or over an existing pathway) The route travels over an existing multi-lane divided facility.
- Give the direction of travel (north, east, south, and west) South.
- Name the focal point city or cities. The entire route change is within the Kansas City, Kansas Metro area between Overland Park and Merriam.
- Length of route in miles. 8
- Where does it end? (Terminal intersection or mile marker) Junction I-35 & I-435, new MILEPOST 18.